


WIDTH: 250/270 cm **WEIGHT : 830 g/m²**



EVENT STRUCTURES

G U A R A N T E E S A N D L A B E L S

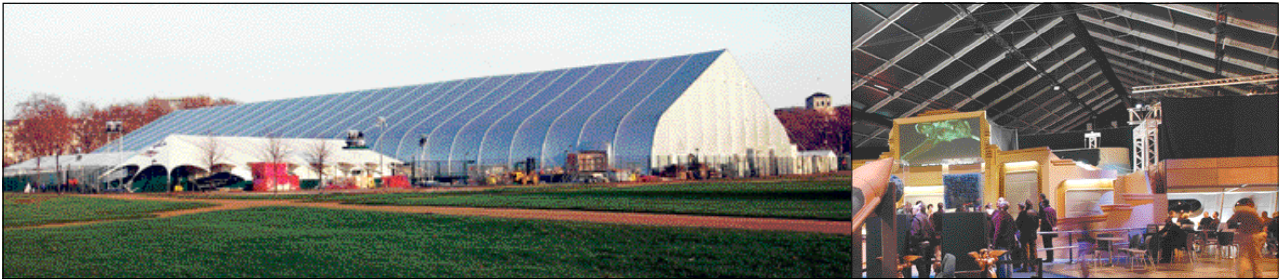

ADVANTAGES

- FERRARI PRÉCONTRAI[®] TECHNOLOGY
- EXCEPTIONALLY LONGEVITY
- UV-RESISTANT
- FLAME RETARDANT
- EXCELLENT OPACITY
- SIMPLIFIED MAINTENANCE: FORMULA **S**

COLOURS AND REFERENCES
 (COLOURS GIVEN FOR INDICATION) **COLO-**

Ref. 702-8103S Opaque
 White/White

TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS	PRÉCONTRAI [®] 702-8103S OPAQUE	TERSUISSE
YARN	1100 dtex PES HT	
WEIGHT	830 g/sqm	EN ISO 2286-2
WIDTH	250/270 cm	
TENSILE STRENGTH (WARP/WEFT)	280/280 daN/5 cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	30/28 daN	DIN 53.363
ADHESION	10 daN/5 cm	EN ISO 2411
FINISH	FORMULA S FLUORIDATED VARNISH WELDABLE	
FLAME RETARDANCY	M2/NFP 92.503 - B1/DIN 4102 - M2/UNE 23727-90 - CALIFORNIA STATE FIRE MARSHAL - NFPA 701 - BS 7837 - SP FULL SCALE TEST - METHOD 2205 - SIS 650082	
EXTREME WORKING TEMPERATURES	-30°C/+70°C	
QUALITY MANAGEMENT SYSTEM	ISO 9000	

The technical characteristics shown are average values given as a guide and may be modified.

